

**METERING & DISPENSING EQUIPMENT FOR THE PROFESSIONAL CONTRACTOR**

## **PCH GMP-025 "LIL' PRO"**




### **APPLICATIONS**

- Joint Filling
- Concrete Restoration
- Small Joint Sealing
- Small Spall Repair
- Anchoring

### **FEATURES AND BENEFITS**

- Portable, Reliable, Rugged Design
- Easy to Operate & Maintain
- Stainless Steel Construction
- Changeable Ratios
- 5 or 9 Gallon Stainless Steel Tanks
- ¼ HP DC Drive Motor
- Manual Dispense Manifold
- Electric Powered
- Backed by AST Warranty
- Pumps Non-Abrasive Materials
- Fixed Ratios of 1:1 to 4:1
- Continuous Flow Up to 0.4 GPM
- Fluid Pressures Up to 750 PSI
- Viscosities Up to 5,000 CPS
- Variable Flow Rate
- Uses AST GMP Metering Pumps

## PRODUCT SPECIFICATIONS

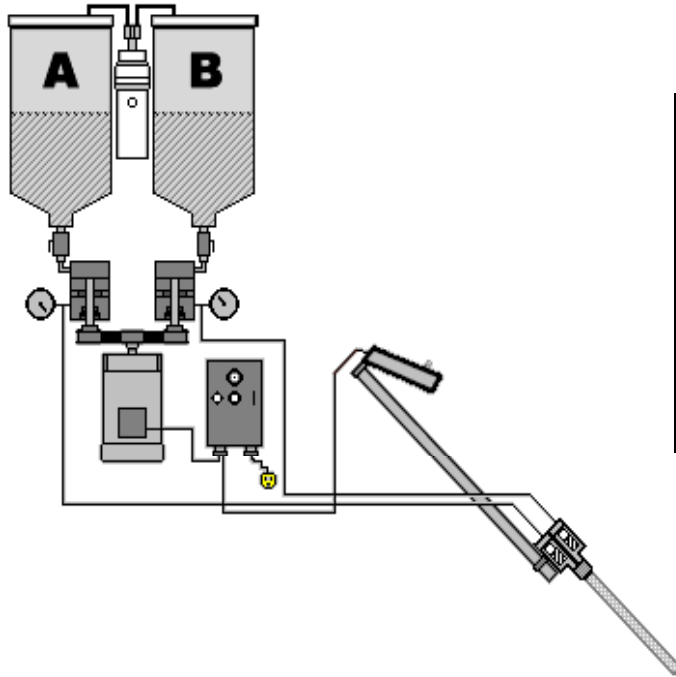

**APPLICATIONS FOR THE "LIL PRO USING  
NON-ABRASIVE POLYUREAS, EPOXIES AND  
URETHANES INCLUDE:**

- SMALL JOINT SEALING
- SMALL SPALL REPAIR
- ANCHORING
- JOINT FILLING
- CONCRETE RESTORATION

<b>MODEL</b>	PCH GMP-025	<b>FRAME</b>	1½ powder coated tubular steel
<b>MACHINE TYPE</b>	Fixed ratio/metering/ dispensing GMP gear	<b>AIR DRYER</b>	Desiccant cartridge
<b>CONTINUOUS OUTPUT</b>	Up to 0.4 gallons per minute	<b>GAUGES</b>	(2) glycerin filled 600 psi
<b>RATIO RANGE</b>	1:1 to 4:1	<b>STANDARD CONTROLS</b>	On/Off; variable speed
<b>VISCOSITY RANGE</b>	100 CPS to 5,000 CPS	<b>SERVICES REQUIRED</b>	120 V. / 8 AMP
<b>CONTAINERS</b>	5 gallons each side, stainless steel, 16 gauge	<b>APPLICATORS</b>	AST hand held; manual dual port manifold
<b>MOTOR</b>	.25 HP D, 90 volt	<b>MIXER</b>	Disposable, plastic, motionless
<b>METERING PUMPS</b>	(2) heavy duty AST GMP gearotor™	<b>HOSES</b>	Teflon core braided stainless steel 3/8" x 15'
<b>DIMENSIONS</b>	24" L x 24" W x 40" H 150 lbs. empty, shipping weight 215 lbs.	<b>OPTIONS</b>	Automatic dispense valve heated tanks, generator mount

**ADHESIVE SYSTEMS TECHNOLOGY CORP.**  
9000 Science Center Drive, New Hope, MN 55428  
Phone: 763-592-2060 • Fax: 763-592-2075  
www.ast-corp.net • ast@ast-corp.net